

# SG2M025075LJ

TriQSiC™ 750V Silicon Carbide Power MOSFET G2 ( N Channel Enhancement )

## Features


- High speed switching
- Very low switching losses
- Fully controllable dv/dt
- High blocking voltage with low on-resistance
- Fast intrinsic diode with low reverse recovery (Qrr)
- Temperature independent turn-off switching losses
- Halogen free, RoHS compliant

## Benefits

- Cooling effort reduction
- Efficiency improvement
- Reduced cooling requirements
- Increased power density
- Increased system switching frequency

## Applications

- On-board charger/PFC
- EV battery chargers
- Booster/DC-DC converter
- Switch mode power supplies

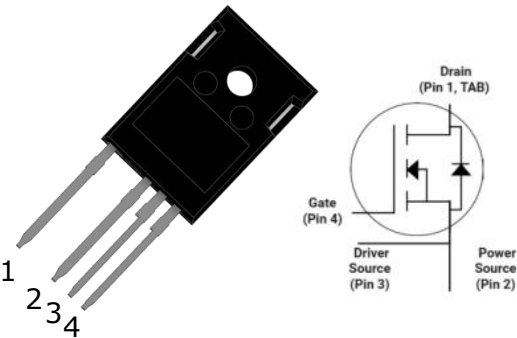

TO-247-4L



Table 1 Key performance and package parameters

| Type         | V <sub>DS</sub> | I <sub>DS</sub><br>(T <sub>C</sub> = 25°C,<br>R <sub>th(j-c),max</sub> ) | R <sub>DS(on), typ</sub><br>(V <sub>GS</sub> = 18V, I <sub>D</sub> = 34A,<br>T <sub>J</sub> = 25°C) | T <sub>J,max</sub> | Marking      | Package   |
|--------------|-----------------|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--------------------|--------------|-----------|
| SG2M025075LJ | 750V            | 92A                                                                      | 25mΩ                                                                                                | 175°C              | SG2M025075LJ | TO-247-4L |

## Table of contents

|                                             |    |
|---------------------------------------------|----|
| Features .....                              | 1  |
| Benefits .....                              | 1  |
| Applications .....                          | 1  |
| Table of contents .....                     | 2  |
| 1、 Maximum ratings .....                    | 3  |
| 2、 Thermal characteristics .....            | 3  |
| 3、 Electrical characteristics .....         | 4  |
| 3.1 Static characteristics .....            | 4  |
| 3.2 Dynamic characteristics .....           | 4  |
| 3.3 Switching characteristics .....         | 5  |
| 4、 Electrical characteristic diagrams ..... | 6  |
| 5、 Package drawing ( TO-247-4L-C ) .....    | 11 |
| 6、 Test conditions .....                    | 12 |
| Revision history .....                      | 13 |
| Attention .....                             | 13 |

## 1、Maximum ratings

**Table 2** Maximum rating ( $T_c = 25^{\circ}\text{C}$  unless otherwise specified)

| Symbol         | Parameter                                     | Value       | Unit               | Test Conditions                                       | Note   |
|----------------|-----------------------------------------------|-------------|--------------------|-------------------------------------------------------|--------|
| $V_{DS,max}$   | Drain source voltage                          | 750         | V                  | $V_{GS} = 0V, I_D = 100\mu A$                         |        |
| $V_{GS,max}$   | Gate source voltage                           | -10 / +22   | V                  | Absolute maximum values                               | Note1  |
| $V_{GS,pulse}$ | Gate-source voltage,max.<br>transient voltage | -10 / +25   | V                  | $t_p \leq 0.5\mu s, D < 0.01$                         |        |
| $V_{GSop}$     | Gate source voltage                           | -4 / +18    | V                  | Recommended operational values                        |        |
| $I_D$          | Continuous drain current                      | 92          | A                  | $V_{GS} = 18V, T_C = 25^{\circ}\text{C}$              | Fig.19 |
|                |                                               | 65          |                    | $V_{GS} = 18V, T_C = 100^{\circ}\text{C}$             |        |
| $I_{D(pulse)}$ | Pulsed drain current                          | 184         | A                  | Pulse width $t_p$ limited by $T_{J,max}$              | Fig.22 |
| $P_D$          | Power dissipation                             | 326         | W                  | $T_C = 25^{\circ}\text{C}, T_J = 175^{\circ}\text{C}$ | Fig.20 |
| $T_J, T_{stg}$ | Operating Junction and storage<br>temperature | -55 to +175 | $^{\circ}\text{C}$ |                                                       |        |
| $T_L$          | Soldering temperature                         | 260         | $^{\circ}\text{C}$ | 1.6mm (0.063") from case for 10s                      |        |
| $T_M$          | Mounting torque                               | 1           | Nm                 | M3 or 6-32 screw                                      |        |
|                |                                               | 8.8         | lbf-in             |                                                       |        |

Note 1: when using MOSFET Body Diode  $V_{GS,max} = -4 / +22V$

## 2、Thermal characteristics

**Table 3** Thermal characteristics

| Symbol        | Parameter                                   | Min. | Typ. | Max. | Unit                 | Test Conditions | Note   |
|---------------|---------------------------------------------|------|------|------|----------------------|-----------------|--------|
| $R_{th(j-c)}$ | Thermal resistance from junction<br>to case | -    | 0.37 | 0.46 | $^{\circ}\text{C/W}$ | -               | Fig.21 |

### 3、Electrical characteristics

#### 3.1 Static characteristics

**Table 4** Static characteristics (Tc = 25°C unless otherwise specified)

| Symbol        | Parameter                                | Min. | Typ. | Max. | Unit       | Test Conditions                                      | Note       |
|---------------|------------------------------------------|------|------|------|------------|------------------------------------------------------|------------|
| $V_{(BR)DSS}$ | Drain-source breakdown voltage           | 750  | -    | -    | V          | $V_{GS} = 0V, I_D = 100\mu A$                        |            |
| $V_{GS(th)}$  | Gate threshold voltage                   | 2.3  | 2.8  | 3.6  | V          | $V_{DS} = V_{GS}, I_D = 11mA$                        | Fig.11     |
|               |                                          | -    | 2.2  | -    | V          | $V_{DS} = V_{GS}, I_D = 11mA$<br>$T_J = 175^\circ C$ |            |
| $I_{DSS}$     | Zero gate voltage drain current          | -    | 1    | 10   | $\mu A$    | $V_{DS} = 750V, V_{GS} = 0V$                         |            |
| $I_{GSS}$     | Gate source leakage current              | -    | -    | 100  | nA         | $V_{GS} = 18V, V_{DS} = 0V$                          |            |
| $R_{DS(on)}$  | Current drain-source on-state resistance | -    | 29   | 42   | m $\Omega$ | $V_{GS} = 15V, I_D = 34A$                            | Fig.4,5, 6 |
|               |                                          | -    | 39   | -    |            | $V_{GS} = 15V, I_D = 34A,$<br>$T_J = 175^\circ C$    |            |
|               |                                          | -    | 25   | 33   |            | $V_{GS} = 18V, I_D = 34A$                            |            |
|               |                                          | -    | 38   | -    |            | $V_{GS} = 18V, I_D = 34A,$<br>$T_J = 175^\circ C$    |            |
| gfs           | Transconductance                         | -    | 24   | -    | S          | $V_{DS} = 20V, I_D = 34A$                            | Fig.7      |
|               |                                          | -    | 22   | -    |            | $V_{DS} = 20V, I_D = 34A,$<br>$T_J = 175^\circ C$    |            |
| $R_{g,int}$   | Intenal gate resistance                  | -    | 2.8  | -    | $\Omega$   | $V_{AC} = 25mV, f = 1MHz,$<br>open drain             |            |

#### 3.2 Dynamic characteristics

**Table 5** Dynamic characteristics (Tc = 25°C unless otherwise specified)

| Symbol    | Parameter           | Min. | Typ. | Max. | Unit    | Test Conditions                                                                   | Note       |
|-----------|---------------------|------|------|------|---------|-----------------------------------------------------------------------------------|------------|
| $C_{iss}$ | Input capacitance   | -    | 2020 | -    | pF      | $V_{DS} = 500V, V_{GS} = 0V$<br>$T_J = 25^\circ C, V_{AC} = 25mV$<br>$f = 100kHz$ | Fig.17, 18 |
| $C_{oss}$ | Output capacitance  | -    | 183  | -    |         |                                                                                   |            |
| $C_{rss}$ | Reverse capacitance | -    | 10.2 | -    |         |                                                                                   |            |
| $E_{oss}$ | Coss stored energy  | -    | 26   | -    | $\mu J$ |                                                                                   | Fig.16     |

## 750V SiC Power MOSFET

|          |                    |   |    |   |    |                                                  |        |
|----------|--------------------|---|----|---|----|--------------------------------------------------|--------|
| $Q_{gs}$ | Gate source charge | - | 20 | - | nC | $V_{DS} = 500V, V_{GS} = -4/+18V$<br>$I_D = 34A$ | Fig.12 |
| $Q_{gd}$ | Gate drain charge  | - | 18 | - |    |                                                  |        |
| $Q_g$    | Gate charge        | - | 61 | - |    |                                                  |        |

## 3.3 Switching characteristics

Table 6 Dynamic characteristics( $T_c = 25^\circ C$  unless otherwise specified)

| Symbol               | Parameter                 | Min. | Typ.  | Max. | Unit | Test Conditions                                                                                                | Note   |  |
|----------------------|---------------------------|------|-------|------|------|----------------------------------------------------------------------------------------------------------------|--------|--|
| E <sub>on</sub>      | Turn on switching energy  | -    | 122.7 | -    | μJ   | V <sub>DS</sub> = 500V, V <sub>GS</sub> = -4/+18V<br>I <sub>D</sub> = 34A, R <sub>g</sub> = 2.5Ω<br>L = 16.7μH | Fig.26 |  |
| E <sub>off</sub>     | Turn off switching energy | -    | 47.8  | -    |      |                                                                                                                |        |  |
| t <sub>d (on)</sub>  | Turn on delay time        | -    | 13    | -    | ns   |                                                                                                                | Fig.27 |  |
| t <sub>r</sub>       | Rise time                 | -    | 14    | -    |      |                                                                                                                |        |  |
| t <sub>d (off)</sub> | Turn off delay time       | -    | 26.4  | -    |      |                                                                                                                |        |  |
| t <sub>f</sub>       | Fall time                 | -    | 8.7   | -    |      |                                                                                                                |        |  |

Table 7 Body diode characteristics

| Symbol    | Parameter                        | Min. | Typ. | Max. | Unit | Test Conditions                                                                              | Note       |
|-----------|----------------------------------|------|------|------|------|----------------------------------------------------------------------------------------------|------------|
| $V_{SD}$  | Diode forward voltage            | -    | 3.7  | -    | V    | $V_{GS} = -4V, I_{SD} = 17A$                                                                 | Fig.8,9,10 |
|           |                                  | -    | 3.3  | -    | V    | $V_{GS} = -4V, I_{SD} = 17A$<br>$T_J = 175^\circ C$                                          |            |
| $I_S$     | Continuous diode forward current | -    | 73   | -    | A    | $V_{GS} = -4V, T_c = 25^\circ C$                                                             | Note2      |
| $t_{rr}$  | Reverse recovery time            | -    | 23   | -    | ns   | $V_R = 500V, V_{GS} = -4V$<br>$I_{SD} = 34A$<br>$di/dt = 2745A/\mu s$<br>$T_J = 175^\circ C$ |            |
| $Q_{rr}$  | Reverse recovery charge          | -    | 361  | -    | nC   |                                                                                              |            |
| $I_{rrm}$ | Peak reverse recovery current    | -    | 27   | -    | A    |                                                                                              |            |

Note 2: When using SiC Body Diode the maximum recommended  $V_{GS} = -4V$

## 4、Electrical characteristic diagrams

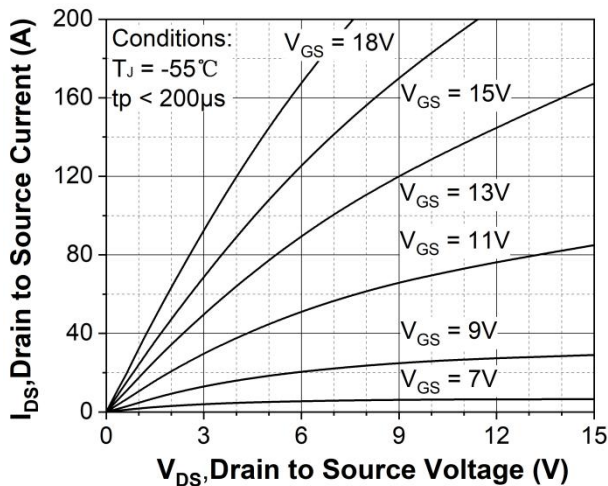
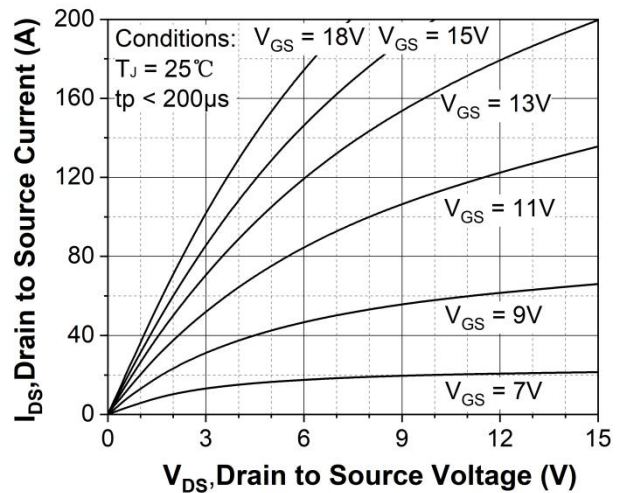
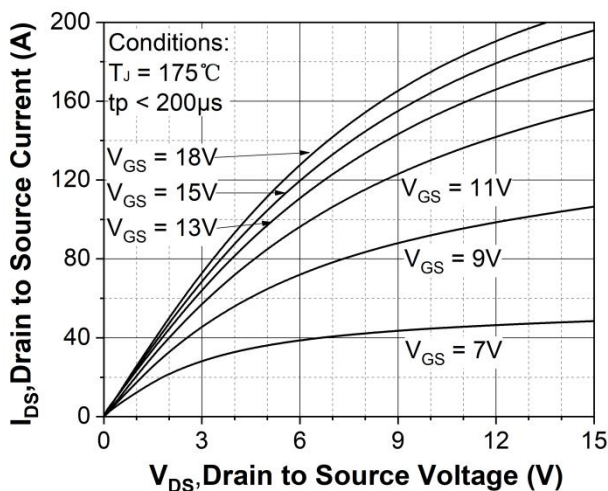
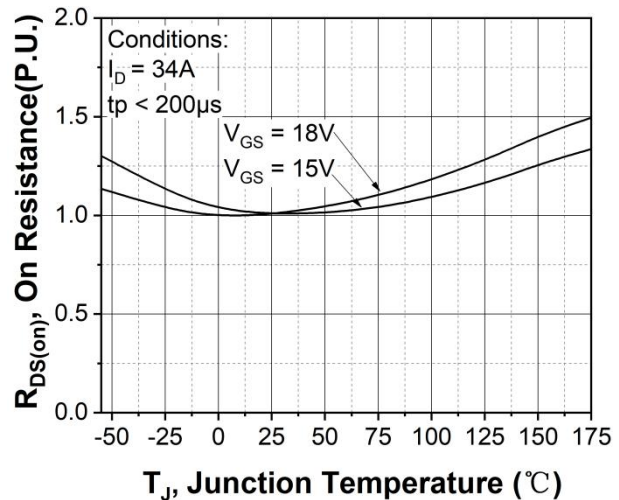
Figure 1. Output characteristics  $T_J = -55\text{ }^{\circ}\text{C}$ Figure 2. Output characteristics  $T_J = 25\text{ }^{\circ}\text{C}$ Figure 3. Output characteristics  $T_J = 175\text{ }^{\circ}\text{C}$ 

Figure 4. Normalized on-resistance vs. temperature

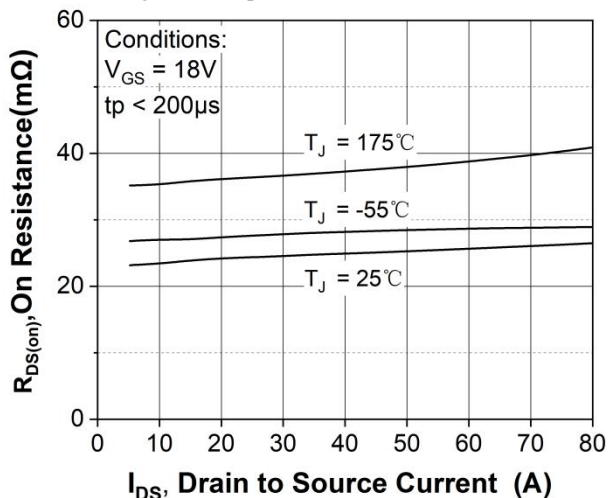


Figure 5. On-resistance vs. drain current

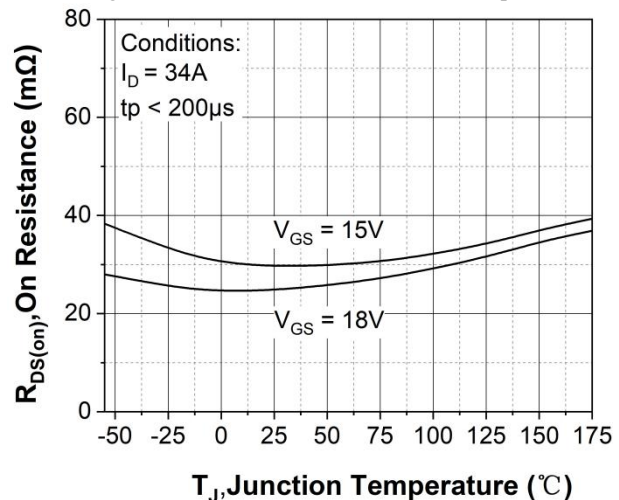


Figure 6. On-resistance vs. temperature

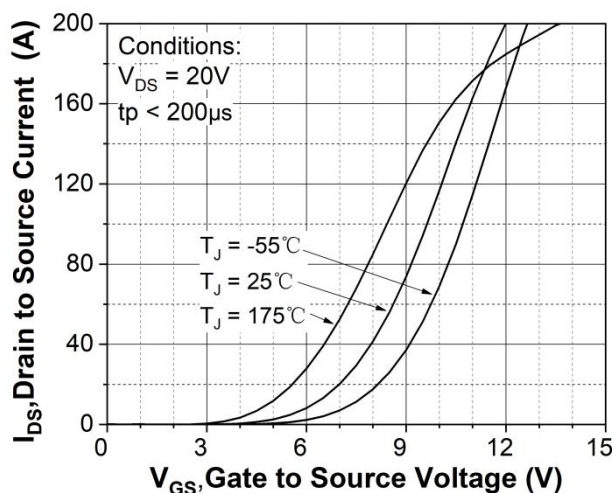


Figure 7. Transfer characteristic for various junction temperatures

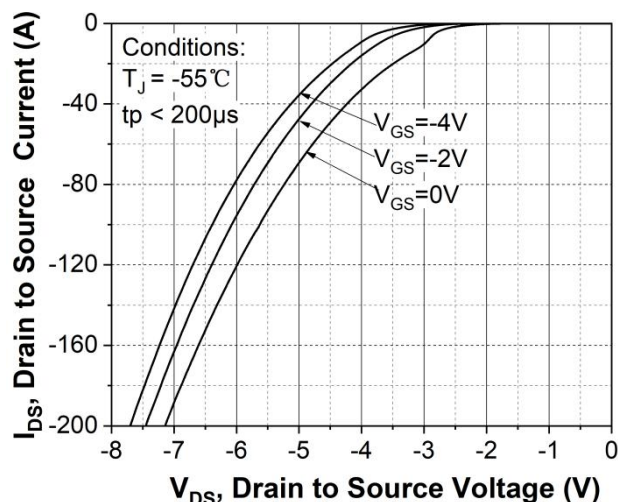


Figure 8. Body diode characteristic at  $T_J = -55^\circ\text{C}$

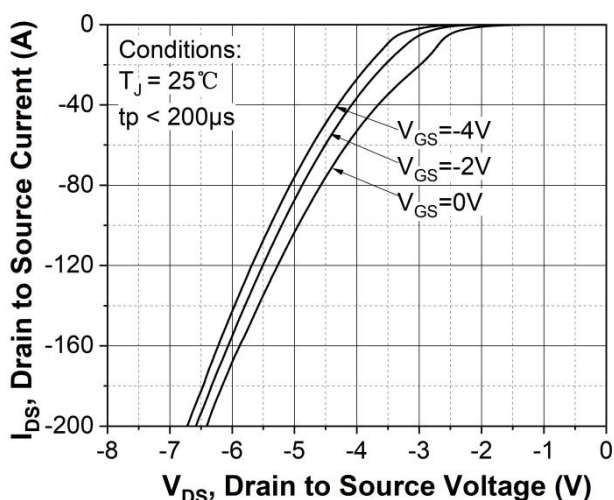


Figure 9. Body diode characteristic at  $T_J = 25^\circ\text{C}$

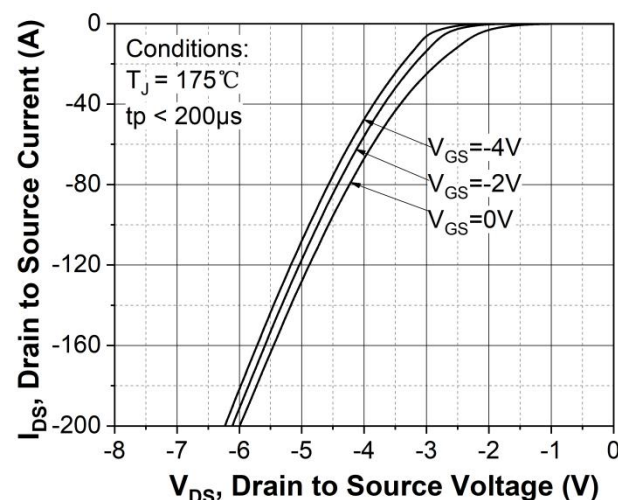


Figure 10. Body diode characteristic at  $T_J = 175^\circ\text{C}$

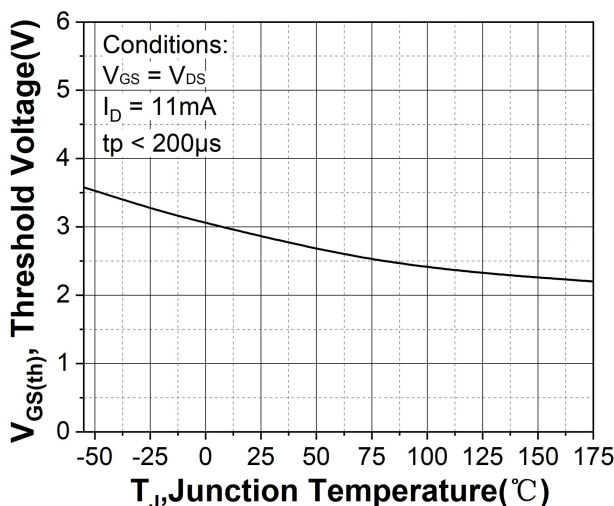


Figure 11. Threshold voltage vs. temperature

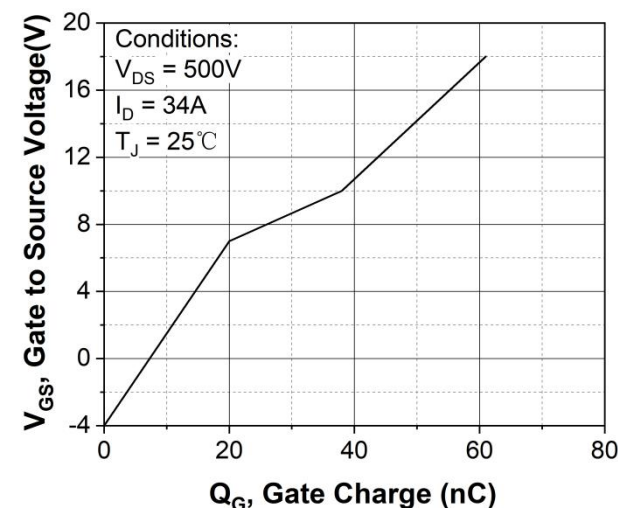


Figure 12. Gate charge characteristic

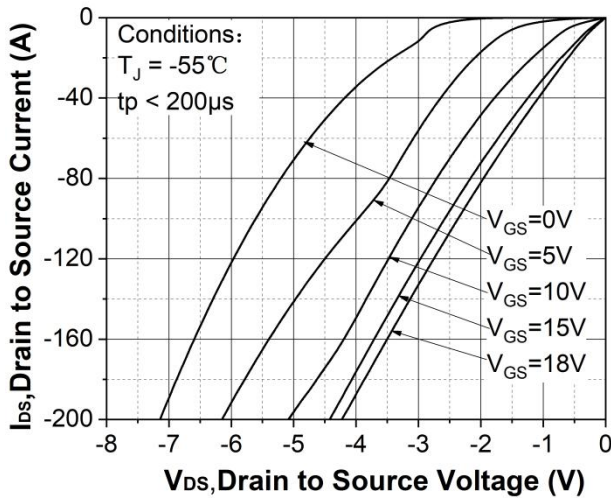


Figure 13. 3rd quadrant characteristic at  $T_J = -55^\circ\text{C}$

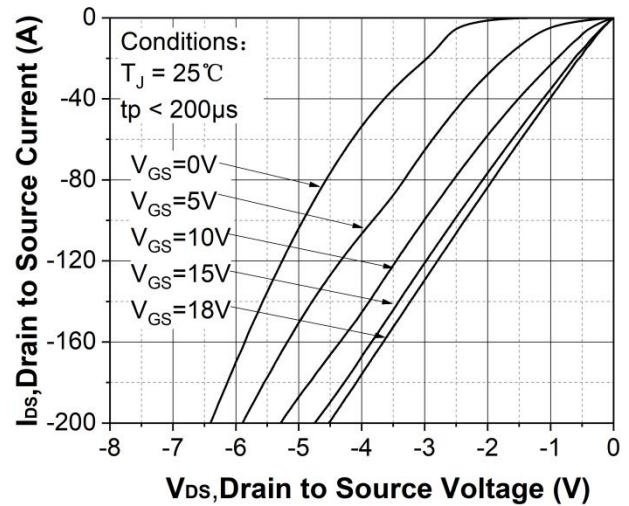


Figure 14. 3rd quadrant characteristic at  $T_J = 25^\circ\text{C}$

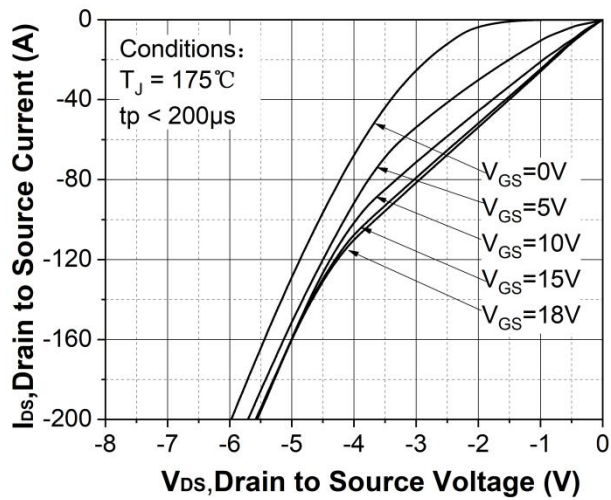


Figure 15. 3rd quadrant characteristic at  $T_J = 175^\circ\text{C}$

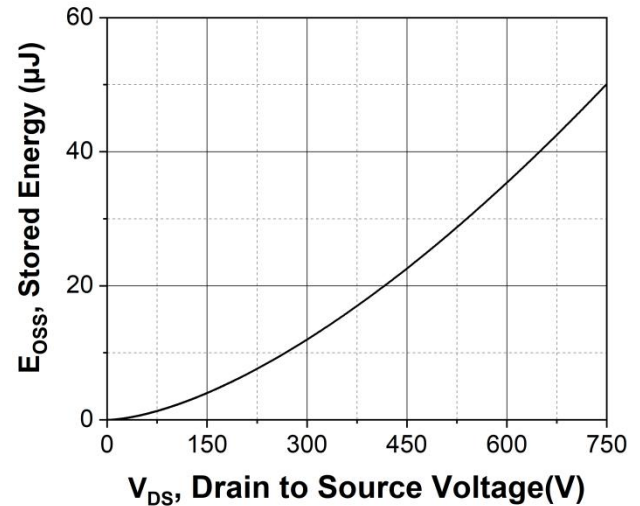


Figure 16. Output capacitor stored energy

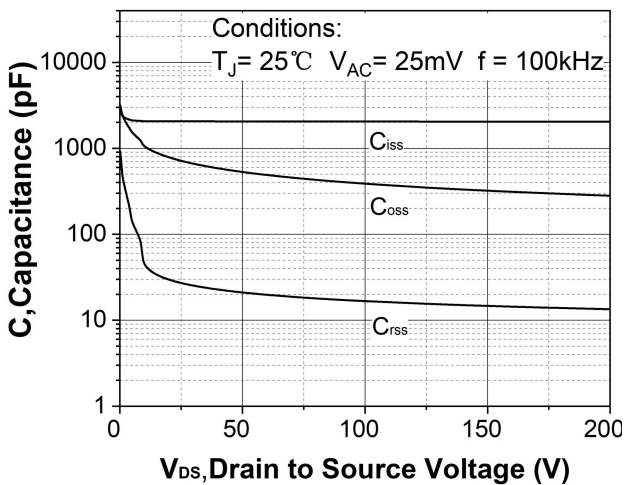


Figure 17. Capacitances vs. drain-source voltage (0 - 200V)

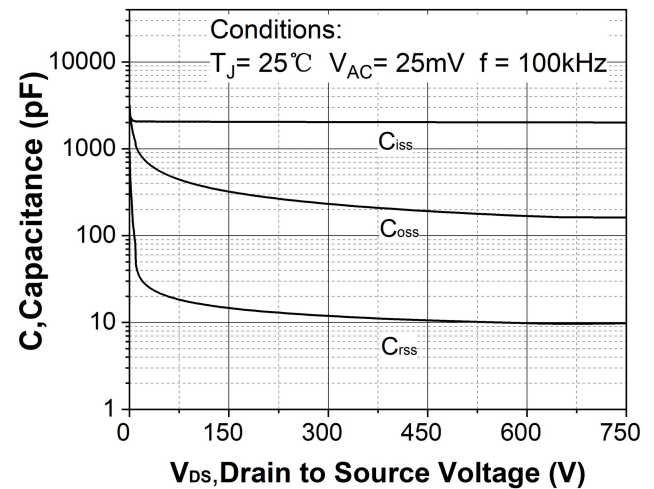


Figure 18. Capacitances vs. drain-source voltage (0 - 750V)

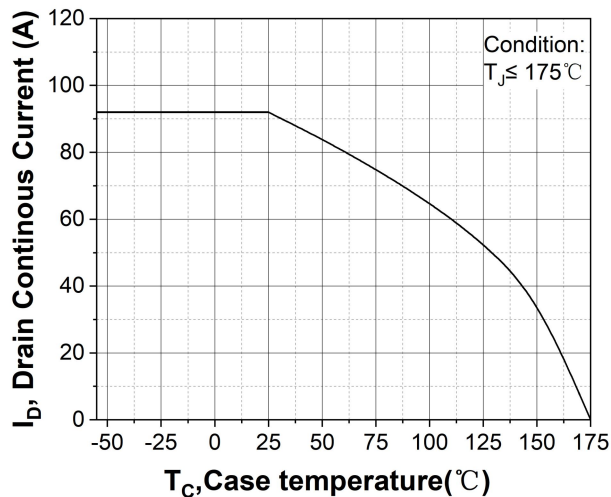


Figure 19. Continuous drain current derating vs. case temperature

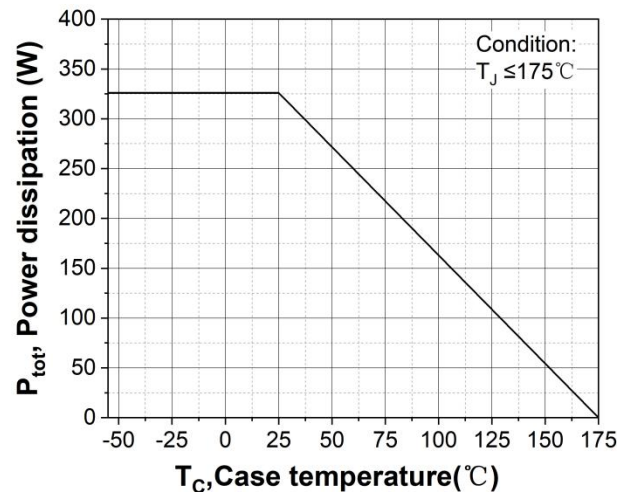


Figure 20. Maximum power dissipation derating vs. case temperature

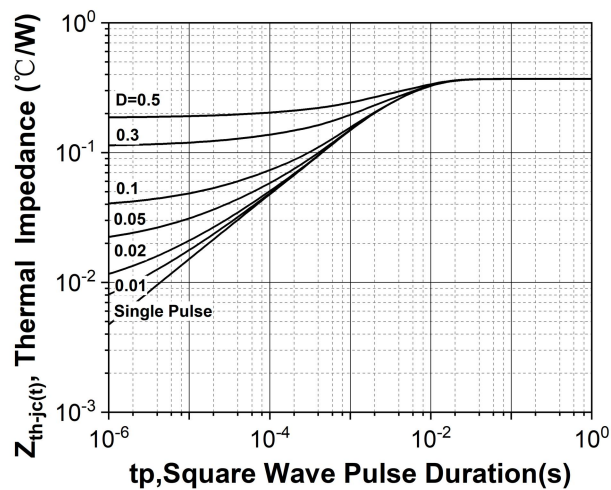


Figure 21. Transient thermal impedance (junction - case)

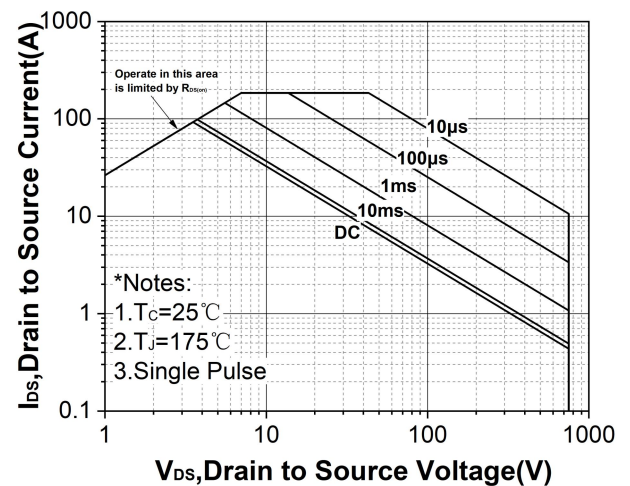


Figure 22. Safe operating area

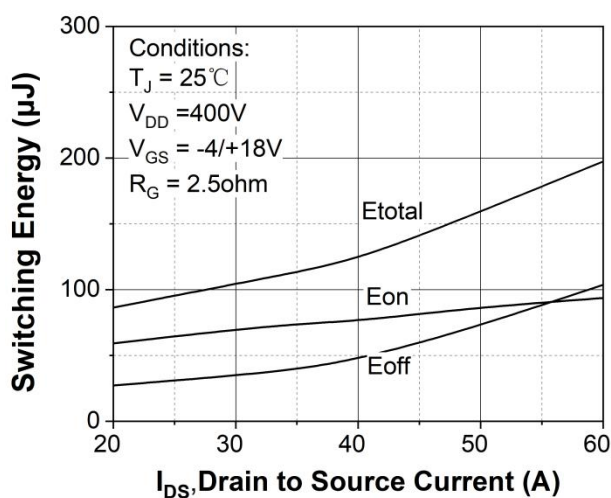


Figure 23. Clamped Inductive switching energy vs. drain current ( $V_{DD} = 400\text{V}$ )

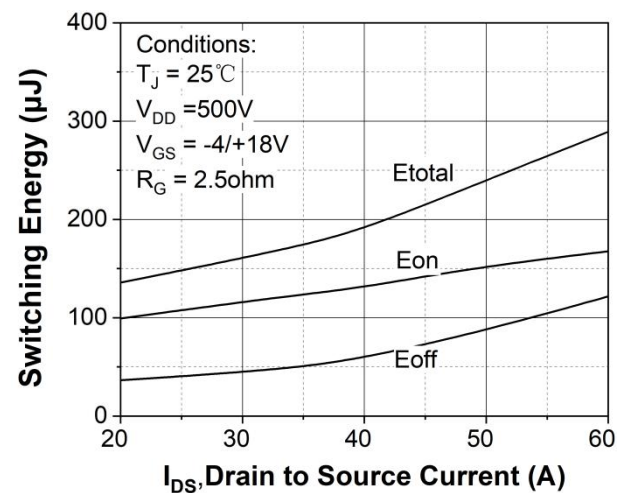


Figure 24. Clamped inductive switching energy vs. drain current ( $V_{DD} = 500\text{V}$ )

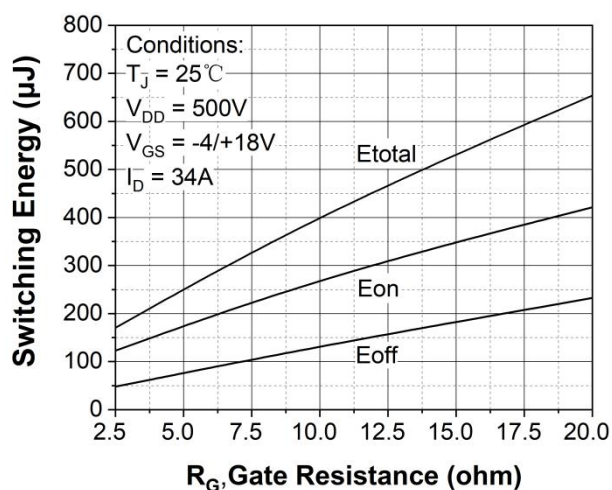


Figure 25. Clamped inductive switching energy vs.  $R_G$  (ext)

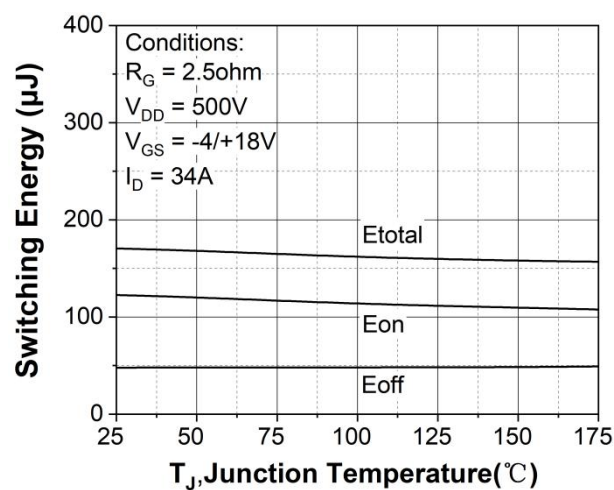


Figure 26. Clamped inductive switching energy vs. temperature

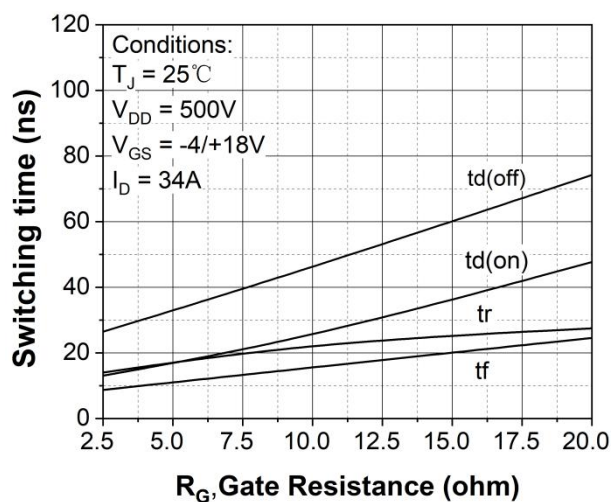



Figure 27. Switching times vs.  $R_G$  (ext)

# SG2M025075LJ

750V SiC Power MOSFET



## 5、 Package drawing ( TO-247-4L-C )

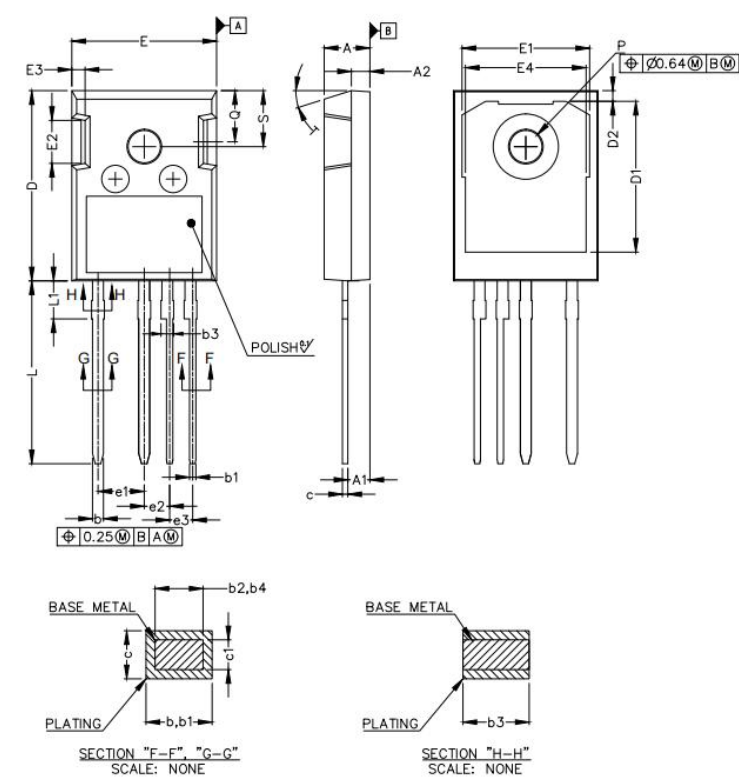

NOTE ;  
1. ALL METAL SURFACES: TIN PLATED,EXCEPT AREA OF CUT  
2. DIMENSIONING & TOLERANCEING CONFIRM TO ASME Y14.5M-1994.  
3. ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.

| SYM | MILLIMETERS |       |
|-----|-------------|-------|
|     | MIN         | MAX   |
| A   | 4.83        | 5.21  |
| A1  | 2.29        | 2.54  |
| A2  | 1.91        | 2.16  |
| b   | 1.10        | 1.30  |
| b1  | 0.65        | 0.79  |
| b2  | 1.10        | 1.25  |
| b3  | 1.34        | 1.44  |
| b4  | 0.65        | 0.74  |
| c   | 0.55        | 0.68  |
| c1  | 0.55        | 0.65  |
| D   | 20.80       | 21.10 |
| D1  | 16.25       | 17.65 |
| D2  | 0.95        | 1.25  |
| E   | 15.75       | 16.13 |
| E1  | 13.10       | 14.15 |
| E2  | 4.32        | 5.10  |
| E3  | 1.00        | 1.90  |
| E4  | 12.38       | 13.43 |
| e1  | 5.08 BSC    |       |
| e2  | 2.79 BSC    |       |
| e3  | 2.54 BSC    |       |
| L   | 19.72       | 20.32 |
| L1  | 3.97        | 4.37  |
| øP  | 3.51        | 3.65  |
| Q   | 5.49        | 6.00  |
| S   | 6.04        | 6.30  |
| T   | 17.5° REF.  |       |

### 6、 Test conditions

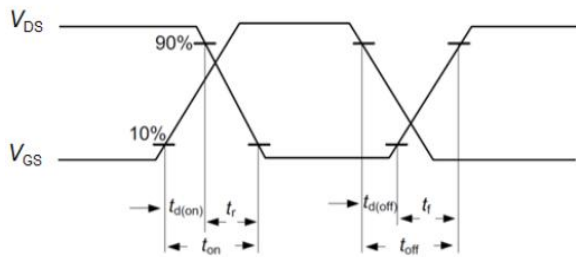


Figure A. Definition of switching times

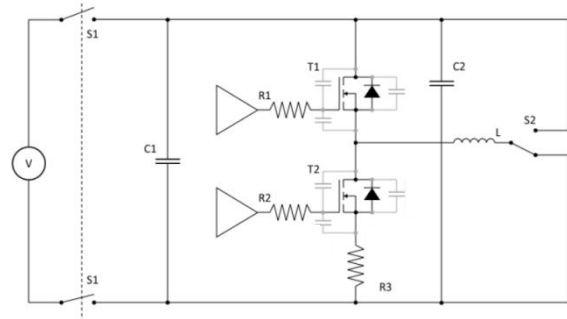


Figure B. Dynamic test circuit

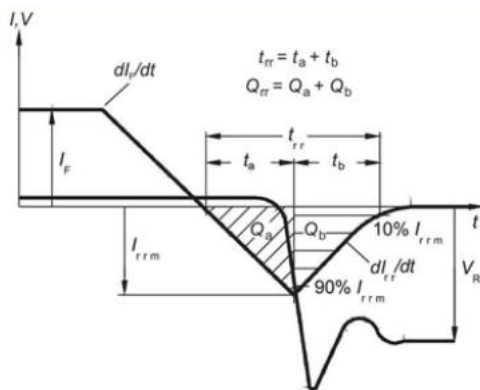


Figure C. Definition of body diode switching characteristics

## Revision history

| Document version | Date of release | Description of changes |
|------------------|-----------------|------------------------|
| V01_00           | 2024-12-11      | — —                    |
| V02_00           | 2025-05-26      | — —                    |
| V02_01           | 2025-07-22      | — —                    |
| V02_02           | 2025-08-14      | — —                    |
| V03_00           | 2025-08-28      | — —                    |

## Attention

---

### 1. RoHS compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/ EC (RoHS2), as implemented January 2, 2013.

### 2. REACH compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Sichain representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

3. With respect to information regarding the application of the product, Sichain hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

4. Any information given in this documents subject to customer's compliance with its obligations and any applicable legal requirements, norms and standards concerning any use of the product of Sichain in any customer's applications.

5. Specifications of any and all products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment.

6. Due to technical requirements products may contain dangerous substances. For information on the types in question please contact Sichain office.

7. Except as otherwise explicitly approved by Sichain in a written document signed by authorized representatives of Sichain, Sichain' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

8. For use of our products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a Sichain representatives, for example but not limited to: transportation equipment, primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.